

Derek Marshall Lighting

Fixture Mounting Instructions

Warning: Risk of Fire. Most dwellings built before 1985 have supply wires rated at 60 degrees C. Refer to supply wire markings in wall box. Consult a qualified electrician before installing.

Important: Do not remove glass lens from backing canopy reflector.

1. Be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified, licensed electrician.
3. These fixtures are intended to be mounted to a 4" metal octagon outlet box or equivalent. The box must be directly and securely supported by the building structure.
4. Before starting the installation, disconnect the power to the circuits involved at the electrical panel. Turning off the power at the light switch alone is not sufficient to prevent electrical shock.


Note: The important safeguards and instructions appearing in this page are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors which cannot be built into any product. These factors must be supplied by those installing and operating this fixture.

Unpack the fixture and locate the mounting hardware.

1. Turn off all power to the circuits involved.
2. Attach fixture bracket to electrical box in the wall using two 8-32 screws.
3. Attach ground wire from box to screw on fixture bracket.
4. Attach 120 volt power supply leads to pigtails on the canopy reflector with wire nuts observing color polarity.
5. Insert and screw in the threaded stud into the hole in the center of the fixture bracket. Screw in only about 1/2" or so.
- 6 Slip the canopy reflector with the glass attached on to the stud in the fixture bracket. Screw on the knurled lock nut onto the stud. Tighten firmly with finger pressure only. This will bring the sconce body snugly against the wall.

Screw in bulb (do not exceed maximum wattage as shown on the fixture) and power the circuits. Make sure the bulb does not touch either the glass or the aluminum reflector. The bulb holder can be gently moved to accomplish this.

Do not exceed the rated wattage as printed on the back plate.

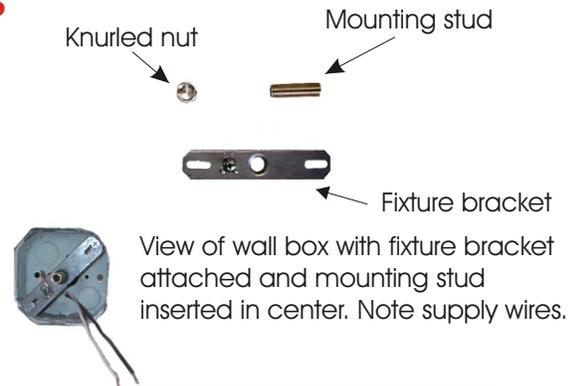

Sconce with wires attached to wall supply by wire nuts.



Placing back plate reflector over mounting stud



Sconce mounted snug to wall with knurled nut.

85 Upper Rd. Sandwich NH 03227

Tel: 603/284-7000 Fax: 603/284-6237 E-mail: info@derekmarshall. Com